# 13m Insulated EWP

## **Altec AT37P**



1.300.1ALTEC
TO SPEAK WITH AN ALTEC REPRESENTATIVE or visit us online at altecaus.com.au




#### **FEATURES**

- Articulating/Telescopic EWP
- Altec ISO-Grip® Single Hand Control
- Insulation per AS1418.10 2011, 66kV (ext.)/33kV Dry & 33kV/33kV Wet
- 180° Bucket Rotator
- 2 Person Bucket
- 2 Tool Circuits at Bucket
- Secondary Stowage System
- Powder-Coated Steel Structures
- Designed in ISO 9001 Certified Facility
- Lifetime Structural Warranty

#### **OPTIONS**

- · Custom Tray Layout, Lockers, and Accessories
- Chassis Spring Interlocks
- Comprehensive Range of Tools and Equipment

#### **REACH DIAGRAM**

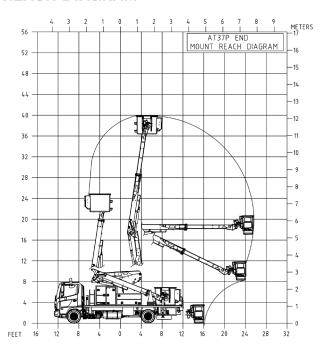

SPECIFICATIONS	Ground to Bottom of Bucket	11.3 m
	dround to bottom of bucket	11.5 111
	Working Height	12.8 m
	Maximum Side Reach (at Bucket Height)	8.0 m
	Bucket Capacity	250 kg
	Upper Boom Articulation	-25 to +85°
	Lower Boom Articulation	-3 to +82°
	Rotation	Continuous
	*Based on a 1 meter chassis frame height.	

### ALTEC ISO-GRIP® SINGLE HANDLE CONTROL



#### 2-PERSON BUCKET



## ALLOWS EASY ACCESS TO BUCKET FROM GROUND



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2021 Altec Inc. All Rights Reserved. AUOSAT46P-0721-v2-r1